

EXSTREAMER



EXSTREAMER 100

**Network audio decoder for
commercial applications and
custom home installations**

Barix AG
Seefeldstrasse 303
CH-8008 Zürich
Switzerland

T +41 43 433 22 11
F +41 44 274 28 49

Barix Technology Inc.
2182 Helena Road
St. Paul, MN 55128
USA

T (866) 815-0866
F (209) 755-8435

www.barix.com
info@barix.com



Plays MP3 files and streams from PC,
web, Shoutcast, Icecast and RTP servers

10/100 Mbit Ethernet connection

Control via standard web browser, IR
remote control, API (serial, TCP, UDP, cgi)

Separate firmware for WMA and MP3
streaming (http, UDP, RTP) with auto-
matic failover and USB playback available

Fully programmable ABCL (Basic dialect)
firmware available on request



EXSTREAMER

Technical Specifications

Audio Formats:

MP3 up to 320 kBit fixed & variable bit rates, G.711 (uLaw/aLaw @ 8 or 24 kHz) and PCM (16bit @ 8 or 24 kHz) in a future release, WMA (separate firmware)

Audio Interfaces:

Stereo RCA, 3.5 mm Headphone Jack, both 4Vpp max (8Vpp in bridge output mode), bass and treble adjustable by browser

Network Interface:

RJ45 10/100 Mbit Ethernet (Auto), TCP/IP, UDP, RTP, DHCP, SNMP, AutoIP, SonicIP, IPzator

Control Interfaces:

RS-232 DSub 9pin male, 300..115200 Baud optional IR Remote kit

Misc:

Two LED (red and green) status indicators, reset/factory default button
USB 1.1 interface for memory sticks (FAT16)

Power requirements:

9 to 30VDC / 12 to 24VAC, 4 Watt max.
power supply included (250g)

Case:

Metal, 250g, 4.25" x 1.5" x 3.1"
108mm x 38mm x 78.7mm

Operating temperature / humidity:

0 - 40°Celsius / 32 - 104 Deg. Fahrenheit
0-70% relative humidity, noncondensing

Certifications:

FCC B, CE B, RoHS compliant (lead free)

User Interface:

browser based, serial port or Ethernet control
API for automation systems, integrated web server for control and configuration

Overview


The Barix Exstreamer 100 is a versatile network audio decoder for a variety of applications. It enables users to create flexible, cost-effective distributed audio systems using standard IP technology.

The Barix Exstreamer 100 plays MP3 (soon also G.711 & PCM) audio files from PC or web server (http) as well as legacy digital and analog sources (using the Barix Instreamer) and streams from sources like Shoutcast, Icecast (Internet radio) or RTP servers (Instreamer).

The device is easily controlled by a standard web browser and with the optional Barix IR remote control. With serial and Ethernet control APIs, the device can also be managed from typical automation systems. Installing the Barix Exstreamer 100 is fast and simple due to its unique features SonicIP and IPzator: On power up the device finds a correct IP address and announces it over the audio and headphone outputs !

Common Applications

- Playing audio from PC, jukebox applications, flash memory
- Multiroom or multizone distributed audio systems for a commercial enterprise or for the home
- Commercial audio streaming applications (airports, hotels, etc.)
- Realtime audio bridging over IP (when used with the Instreamer)
- Paging and announcement applications
- Instore audio distribution (realtime) for retail, restaurants, franchises

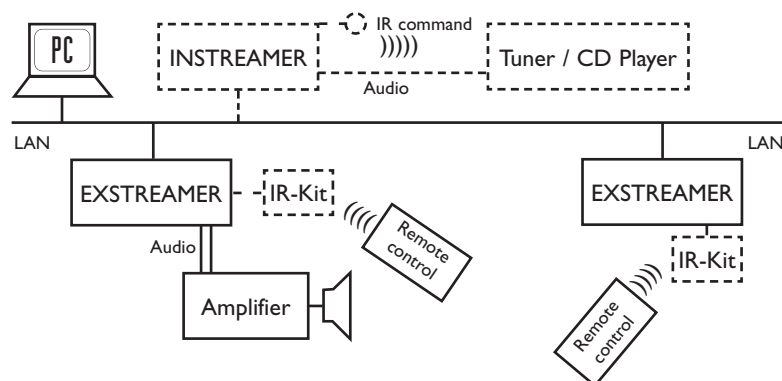

Integration & application development

The Barix Exstreamer 100 supports various control and communication modes. Software developers can easily write audio applications using one of the openly documented Ethernet (cgi, TCP, UDP) or serial interfaces (API). A fully programmable ABCL firmware version is available on request. ABCL stands for Audio Barix Control Language and is a simple to use yet powerful Basic dialect (see separate data sheet).

Streaming Client Firmware

For commercial applications a firmware with WMA and MP3 support, automatic failover (up to 3 URL's / playing from USB memory) and monitoring capabilities is available (see separate data sheet).

For further information, detailed technical specifications and information about other versions and products please visit www.barix.com