

ACCESSORY



BARIX RACK MOUNT

Accessory to mount Barix audio devices in a standard 19" rack


Barix AG
Seefeldstrasse 303
CH-8008 Zürich
Switzerland

T +41 43 433 22 11
F +41 44 274 28 49

Barix Technology Inc.
2182 Helena Road
St. Paul, MN 55128
USA

T (866) 815-0866
F (209) 755-8435

www.barix.com
info@barix.com

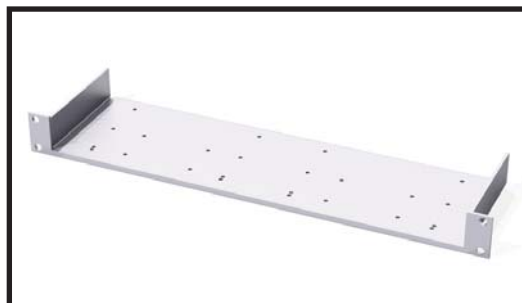

Supports up to four Barix 1/4 width audio devices:

- Annunicom 100
- Annunicom 200
- Exstreamer 100
- Exstreamer 200
- Instreamer 100

Supports up to two Barix 1/2 width audio devices:

- Annunicom 1000
- Exstreamer 1000

Supports mixing of different devices with different widths (e.g. one 1/2 width plus two 1/4 width devices)



ACCESSORY

The Barix Rack Mount is an accessory allowing the mounting of Barix audio devices into a standard 19" rack using one height unit.

For further information and information about other products please visit www.barix.com

Technical Specifications

Application:

Mounting of Barix Audio Devices in standard 19" rack using one height unit (1U)

Material:

Aluminum 6061

Thickness: 0.118" / 3mm

Surface: sand blasted and anodized

Dimensions (overall):

19" x 1.7" x 5.2"

481.9mm x 44mm x 131.7mm

(for details see drawing)

Weight:

550 grams

Misc:

Curved trailing edge to prevent mechanical cable destruction.

Screws for mounting up to four devices included (16 pcs).

Storing temperature:

-40 to 221 Degree Fahrenheit

-40° to 105° Celsius

Operating humidity:

0 - 70% relative humidity, noncondensing



Mounting notes:


Supports mounting of up to two half width devices.


Supports mounting of up to four quarter width devices.

Half rack width devices must be mounted flush left or flush right in the Rack Mount when mixing half width and quarter width devices. Examples:

- Left one half width, right two quarter width
- Left two quarter width, right one half width

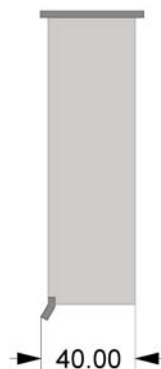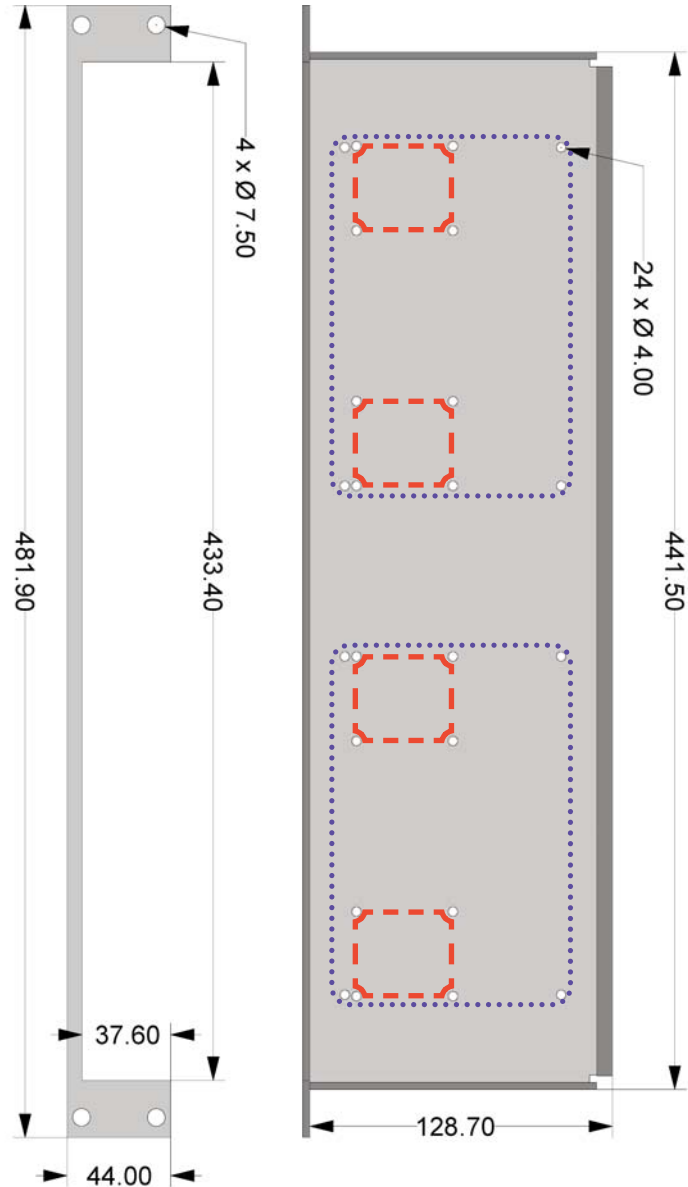

 mounting holes for 1/2 rack width devices

 mounting holes for 1/4 rack width devices